




Grill Mounted Fans

Motor Features:

- UL 507-39 wash down ready
- 3-year warranty on the motor
- Rated severe duty, TEAO
- Class F insulated, -13 thru 104 °F
- Sealed ball bearings front & rear
- Aluminum housing for excellent heat dissipation
- Thermally protected, single phase standard, three phase optional
- Multiple mounting rails offer flexibility
- Speed control options available
- 50 or 60 Hz

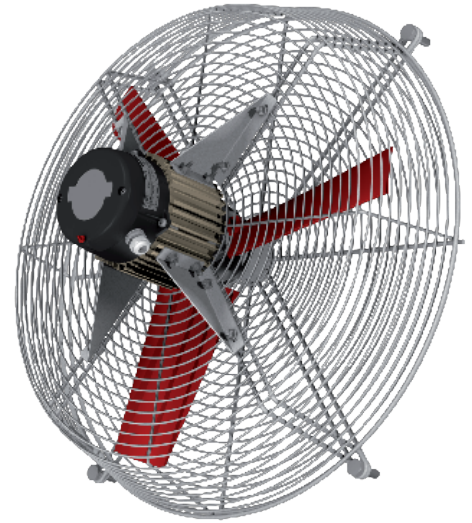

Advantages:

- Ships assembled, ready for operation
- Energy efficient motor and blade combination
- Built from corrosion resistant materials
- Reduced wear on bearings extends motor life
- Sturdy construction
- Galvanized, powder coated, or painted OSHA guard options
- Thousands of possible custom blade and motor options for targeted performance
- Standard and high temperature options
- Multiple voltage and hertz options
- Custom applications (OEM)



Blade Features:

- 3 independent blade systems and 4 blade profiles
- Polypropylene, polypropylene with fiberglass, or nylon blade material
- Polypropylene and aluminum hubs
- Several color options available
- Forward or reverse airflow options
- Poly blades require less torque at start up
- Reduced in-rush current duration

